

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/15926 A1

(51) International Patent Classification⁷: **B60J 10/00**

(21) International Application Number: **PCT/GB00/02975**

(22) International Filing Date: **2 August 2000 (02.08.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
9920394.5 27 August 1999 (27.08.1999) **GB**

(71) Applicant (for all designated States except US): **GEN-CORP PROPERTY INC. [US/US]; P.O. Box 537012, Sacramento, CA 95853-7012 (US).**

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.


(72) Inventor; and

(75) Inventor/Applicant (for US only): **MAASS, Klaus, Peter [DE/DE]; Theinstrasse 115, 41749 Viersen (DE).**

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(74) Agent: **MATHISEN, MACARA & CO.; The Coach House, 6-8 Swakeleys Road, Ickenham, Uxbridge UB10 8BZ (GB).**

(54) Title: **SEALING AND GUIDING STRIP FOR A WINDOW**

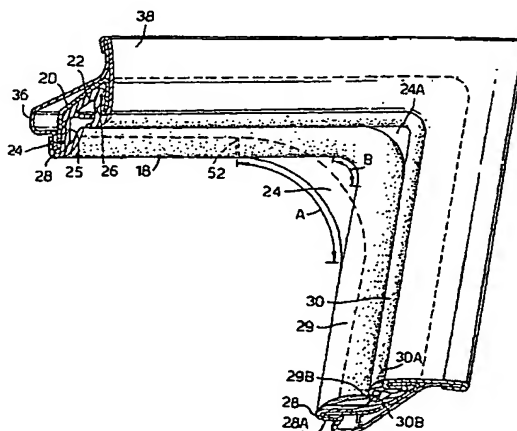

(57) Abstract: A window sealing and guiding channel (18) for a window frame (12) carried by a vehicle door is arranged to match the sharp angle at the corner (16) of the frame (12). A distal lip (28) of the wall of the channel (18) on the inside of the window is severed from the remainder of the channel side wall (24) from a point (U) on one side of the sharp corner (16), through the sharp corner (16) to the end of the channel, and this lip (28) is bent into a smooth curve (A) to bridge across the sharp corner. The lip (30) on the other channel side wall (26) is also severed from the remainder of its side wall at the sharp corner (16). In addition, the lip (30) of this side wall is cut through to form a mitred joint matching the angle at the sharp corner (16). The remainder of the channel (18) is removed at the sharp corner and replaced by a previously moulded insert having a channel-form at the sharp corner and an extended wall portion (24A) filling the gap where the inner lip (28) bridges across the corner. A third wall (25) has a lip (29) which bridges the sharp corner (16) in a smooth curve between the other lips (28) and (30) thereby hiding the moulded insert (47) from view.